

PIR Motion Detector

360° Ceiling Mount

MODEL No: PR-906R


Features

- Microcontroller based design
- Digital Noise reduction algorithm
- Digital Signal Processing to avoid false alarm
- Power On delay Enable/Disable to avoid self alarm on security panel arming
- Superior EMI and RFI Protection
- Sealed Optics
- Relay Output NO / NC selectable
- Walk test LED Enable/Disable selectable
- Automatic temperature compensation
- Programmable sensitivity
- Wall / Ceiling mount




Detection Pattern

Top View:

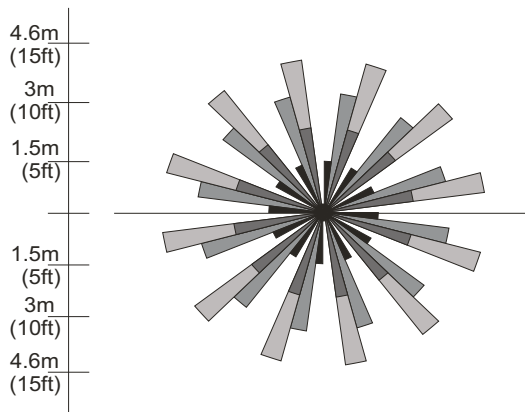

Side View:

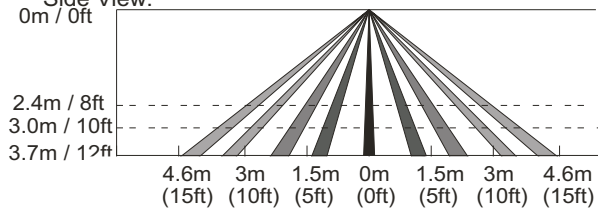

Specifications:

PIR Sensor:	Dual Element
Power Supply:	9 ~ 16 VDC. 12 VDC, 20mA
Alarm Output:	NO/NC, Max. 100VDC, 0.2A
Alarm Period:	Fixed 6 seconds
Tamper Switch:	NC. Cover open, Activates
Detectable Speed:	0.5 ~ 1.5 m/Sec
Mounting Height:	3.0m Typical
Detection Range:	360° x 06m
Walk Test LED:	3mm Red LED. Jumper Selectable to enable/disable
Working Temperature:	
EMI/RFI Immunity:	
Humidity:	

eConzerv Solutions Pvt. Ltd.
 Plot no 25, Survey No. 17/8/24,
 Shivnery Park, Balewadi, Pune - 411 045,
 Maharashtra, India.
 Tele: +91-20-2588 4920, 6530 3130, 9420068913.
 URL: www.econzerv.com
 email: customercare@econzerv.com

