

PIR Occupancy Switch

Recess Mount


Model No: OS-406R

PIR Occupancy Switch is a premium range of Occupancy/ Presence detector. It supports excellent performance with uncomparable optic design.




Detection Pattern

TOP VIEW:

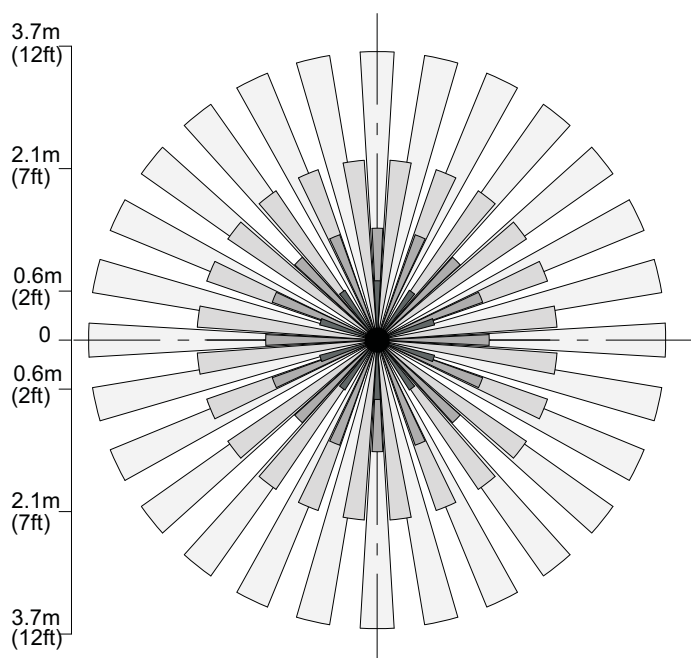

SIDE VIEW:

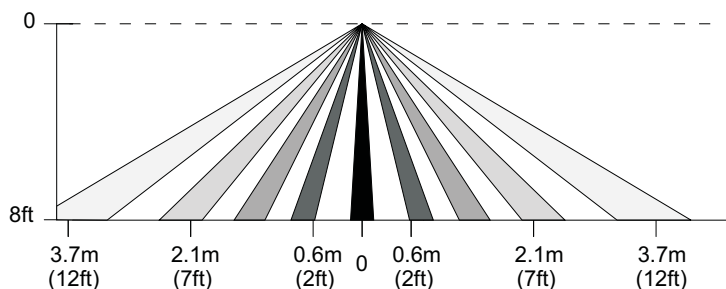

Features

- Recess Mount Sensor
- Surface Mount Kit (Optional)
- Five Operating Modes (Auto/ON/OFF/SEMI ON-OFF)
- Eight number of precision factory calibrated settings for LUX Trip and ON Time
- Infrared programmer (Optional)
- Automatic temperature compensation
- Supply noise, Surge, Short circuit protection
- Low power consumption

Specifications

PIR Sensor	Quad Element
Power Supply	85~265 VAC, 50Hz
Maximum Load	1500W Incandescent 360W Fluorescent.
Detectable Speed	0.5 ~ 1.5 m/Sec
Mounting Height	2.1m Typical
Detection Range	360° X 6m at 25°C
Adjustable Lux level	8 Step Programmable
Walk Test LED	3mm Red LED.

eConzerv Solutions Pvt. Ltd.
 Plot no 25, Near Cummins India Ltd.,
 Shivnery Park, Balewadi, Pune - 411 045,
 Maharashtra, India.
 Tele: +91-20-6530 3130, 9420068913.
 URL: www.zansa.in
 email: customercare@zansa.in

